




Domain[®] ROOFING PRODUCTS SPECIFICATION – SHAFTER, CA

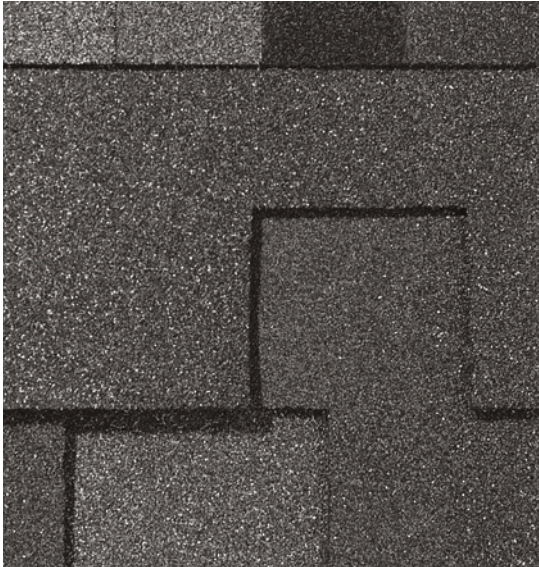

Domain Winslow[®] and Domain Winslow Cool Color Series

Product size (unfolded)	19 3/8" x 40"
(folded)	14 1/4" x 40"
Exposure	5 1/2"
Pieces/Bundle	16
Boxes/Square	4/100 sq. ft.
Squares/Pallet	11

Limited Warranty: 50 years / up to 110 MPH wind warranty*

50-year limited warranty period: non-prorated coverage for shingles and application labor for the initial 10 years; prorated coverage for application labor and shingles for balance of limited warranty period; 5-year limited wind warranty*; option for transferability*.

Vented RidgeCrest [™] hip and ridge (not available in Cool Color Series)	Size: 13" x 13 1/4" Exposure: 9 1/4" Coverage: 5 boxes = 100 linear feet
RidgeCrest [™] hip and ridge (not available in Cool Color Series)	Size: 9 1/8" x 13 1/4" Exposure: 9 1/4" Pieces/box: 32 Coverage: 4 boxes = 100 linear feet
Z [®] Ridge hip and ridge	Size: 9 7/8" x 13 1/4" Exposure: 5 1/2" Pieces/bundle: 72 Coverage: 3 bundles = 100 linear feet
Elk Starter Strip	Pieces/bundle: 19 1 Bundle = 120.33 linear feet
Domain Starter Strip	Size: 39 1/2" x 13 1/4" Pieces/bundle: 18 1 Bundle = 59.25 linear feet

Brand	Model	Type	Reflectance	Emittance	CRRC ID#
Elk	Domain Winslow	Cool Browncastle	0.25	0.85	0710-0001

Available Colors: Browncastle, Cimarron, Ravenswood, Shadow Gray, Stonehenge.
Available Cool Colors: Cool Browncastle.

Domain roofing products contain Elk WindGuard[®] sealant. WindGuard activates with the sun's heat, to resist blow-offs and leaks.

Elk Domain Winslow and Domain Winslow Cool Color shingles meet Wind Resistant ratings UL 997/ASTM D 3161 Class "F", Uplift Resistance UL 2390/ASTM D 6381 Class "H", Class "A" Fire ratings UL 790/ASTM E 108, ASTM D 3018, Miami-Dade Building Code, Florida Building Code, the Wisconsin Uniform Dwelling Code, and the Canadian Standards Association (CSA) code A123.5. Elk shingles meet the acceptance criteria of AC 127 (ICC-ES ESR-1001). Elk Domain Winslow and Domain Winslow Cool Color shingles also meet ASTM D 3462 with exclusions for section 4.2 and 4.4, which relate to their non-asphalt interply design. Domain Winslow and Domain Winslow Cool Color Series shingles have the approval of the Texas Department of Insurance.

SPECIFICATION

Scope: Work includes furnishing all labor, materials and equipment necessary to complete installation of Domain Winslow shingles. Color shall be Browncastle, Cimarron, Ravenswood, Shadow Gray, Stonehenge or Cool Browncastle. Hip and ridge type to be **Elk RidgeCrest with FLX (regular or vented; not available in Cool Color Series)**, Elk Z[®]Ridge and/or Elk HighPoint ridge vents (see ridge package for installation instructions).

All exposed metal surfaces (flashing, vents, etc.) to be painted with matching Elk roof accessory paint.

Preparation of Roof Deck: Roof deck to be dry, well-seasoned 1" x 6" (25.4mm x 152.4mm) boards;

exterior-grade plywood (exposure 1 rated sheathing) at least 3/8" (9.525mm) thick conforming to the specifications of the American Plywood Association; 7/16" (11.074mm) oriented strandboard or chipboard. Most fire retardant plywood decks are NOT approved substrates for Elk shingles. Consult Elk Field Service for application specifications over other decks or other slopes.

Materials: Underlayment for standard roof slopes, 4" per foot (101.6/304.8mm) or greater: apply non-perforated No. 15 or 30 asphalt-saturated felt underlayment. Not recommended for low slope application (less than 4/12). Nails shall be of sufficient length and holding power as required in manufacturer's instructions for securing material.

Complete installation instructions are included by Elk with every shingle package. All warranties are contingent upon the correct installation as shown on the instructions. These instructions are the minimum required to meet Elk application requirements. In some areas, building codes may require additional application techniques or methods beyond Elk's instructions. In these cases, the local code must be followed. Under no circumstances will Elk accept application requirements less than those printed here.

For specifications in CSI format call 800.354.SPEC (7732) or e-mail specinfo@elkcorp.com

*See actual warranty for conditions and limitations.

MIDWEST OFFICE:
800.226.6111

SOUTHWEST OFFICE:
888.355.5882

WESTERN OFFICE:
800.791.8545


CORPORATE HEADQUARTERS:
800.354.7732

PLANT LOCATION:
800.355.4968





DIRECTIONS FOR APPLICATION

Please read carefully. Failure to follow these instructions may void the product warranty. See specific application instructions for Domain Winslow 110 MPH limited wind warranty requirements.

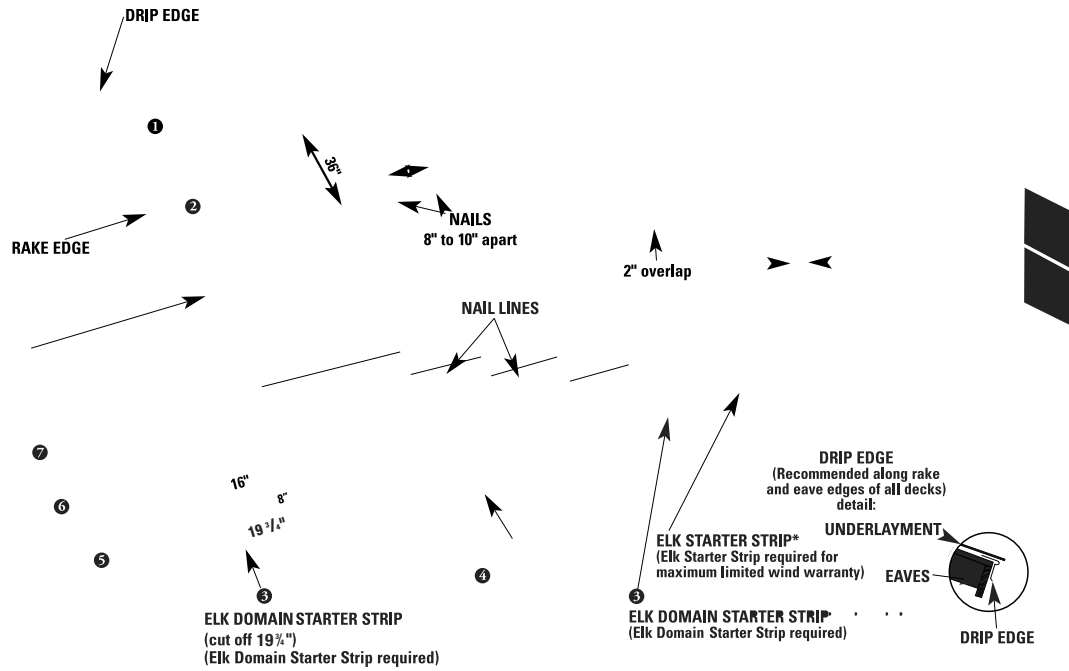

Valley underlayment



STEP FLASHING
(Use ARMA recommendations)